

Thông số kỹ thuật

## 8558A 8.5 Digit Multimeter



### Tính năng chính

- 5 mega-samples-per-second high resolution digitizing, providing exceptional speed and accuracy.
- Intuitive user interface on a color display for easy data viewing in various formats including trend plots, waveforms, FFT, histogram and statistics.
- Direct digitizing capability with a minimum of 100,000 readings per second at 4.5 digits across GPIB, USBTMC, or Ethernet.
- Onboard data memory that can hold up to 15 million readings.
- Programmable front/rear electronic switch for immediate ratio results through a single remote command, and several USB ports for quick and easy data download to a flash drive.

### Tổng quan sản phẩm: 8558A 8.5 Digit Multimeter

#### Accurate data, delivered amazingly fast

Shorter test time on the 8588A/8558A high-speed digital platform enables you to increase throughput, improve yield and realize a greater return on your investment. The 8588A/8558A digitizes to memory at 200 nanoseconds per reading and delivers 4.5 digit data to a PC via USB, Ethernet and GPIB at 100,000 readings per second. Fast, high resolution data capture gives you the quantity and quality of information you need to make timely, correct decisions affecting system throughput and efficiency.

- 0 ns to 100 s aperture setting allows industry's widest flexibility to control data capture window
- Reading speed: 1 reading /s @ 8.5 digits to 100,000 reading /s @ 4.5 digits
- Data transfer from memory to PC: up to 500,000 readings /s in binary format through USB, up to 200,000 through Ethernet and GPIB

## Debug and perfect your device under test


The 8558A features a 5 mega-sample digitizing rate with up to 20 MHz analog bandwidth, making it the first and only instrument on the market that can characterize extremely low level transient signals at 18-bit resolution. This capability makes it easier to debug designs, uncover anomalies and perfect your devices under test for use in real life environments.

- Voltage sensitivity to hundreds of nV and current sensitivity to hundreds of pA allows you uncover ultra-low level transient signals
- Up to 20 MHz bandwidth for voltage and 4 MHz for current retains high bandwidth content of the signal measured
- 18-bit SAR analog-to-digital converter that achieves 5 mega-samples per second
- 5 mega-samples per second sample rate, into buffer, for capturing complex, fast changing waveforms
- 15 million readings memory allows large amount of data storage eliminating the immediate need to transfer data to a PC
- Graphical waveform display enables real-time visualization of complex waveforms, increased productivity with faster access to results and answers


## Fast, reliable and accurate system compatibility

Inserting a new instrument into a tightly synchronized system can create overhead and incompatibility. The 8558A's digital platform includes common connectivity interfaces plus precise triggering that lets it digitize, integrate and transfer data to anywhere in the system for analysis, with minimal obstruction and the highest reliability.


- GPIB, USBTMC, Ethernet allows industry standard selection of remote interface
- USB thumb drive enable quick and easy data transfer to PC in .csv format
- SCPI compliant commands with 8505A and 3458A emulation mode simplifies and accelerates system upgrade process to [8588A/8558A](#)
- Fully supports [MET/CAL calibration procedures](#) library that commands the Fluke 8508A
- IVI Driver for industry standard control of DMM on 8558A/8588A
- Trigger Mechanisms: External BNC Trigger Trig In and Trig Out, Edge or level trigger, Timer trigger, Epoch trigger, Line trigger
- Less than 100 ns trigger latency with external BNC trigger for digitize voltage and current

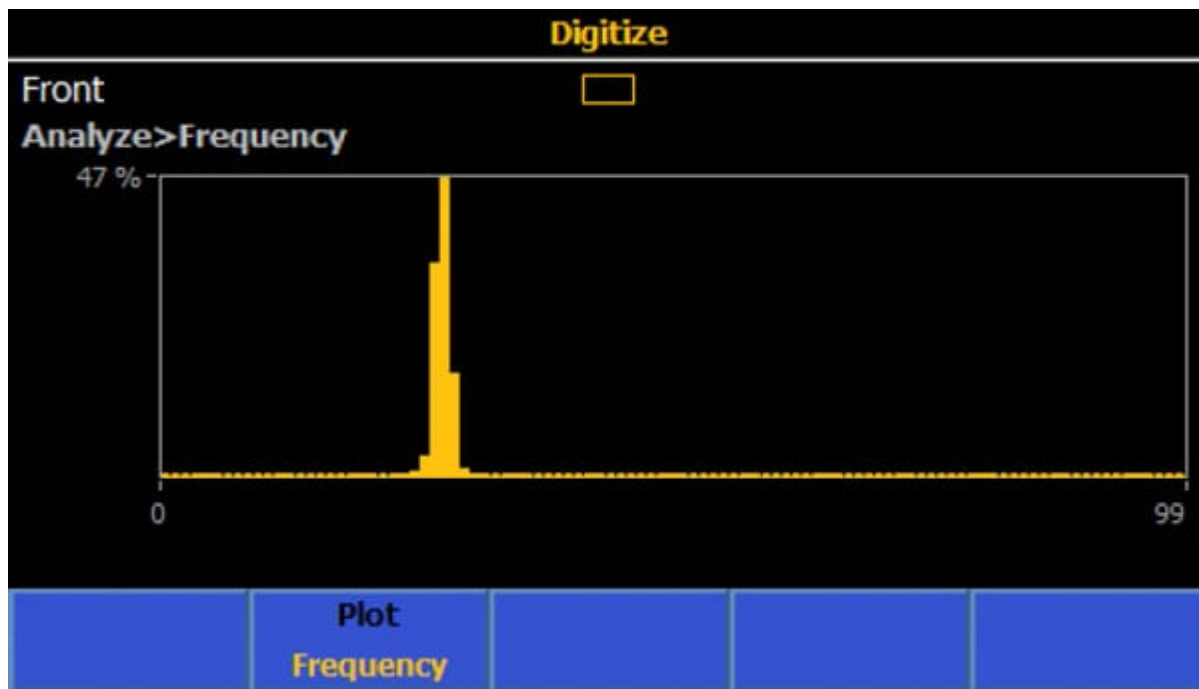

Analyze: FFT

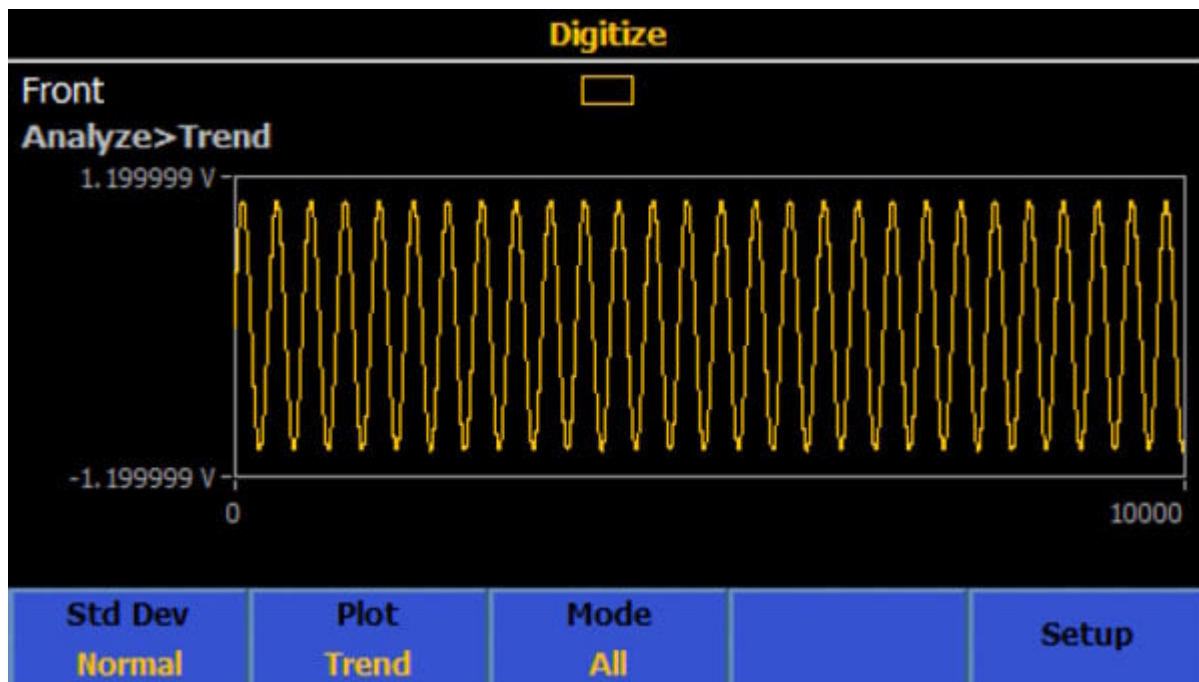

Trend Plot

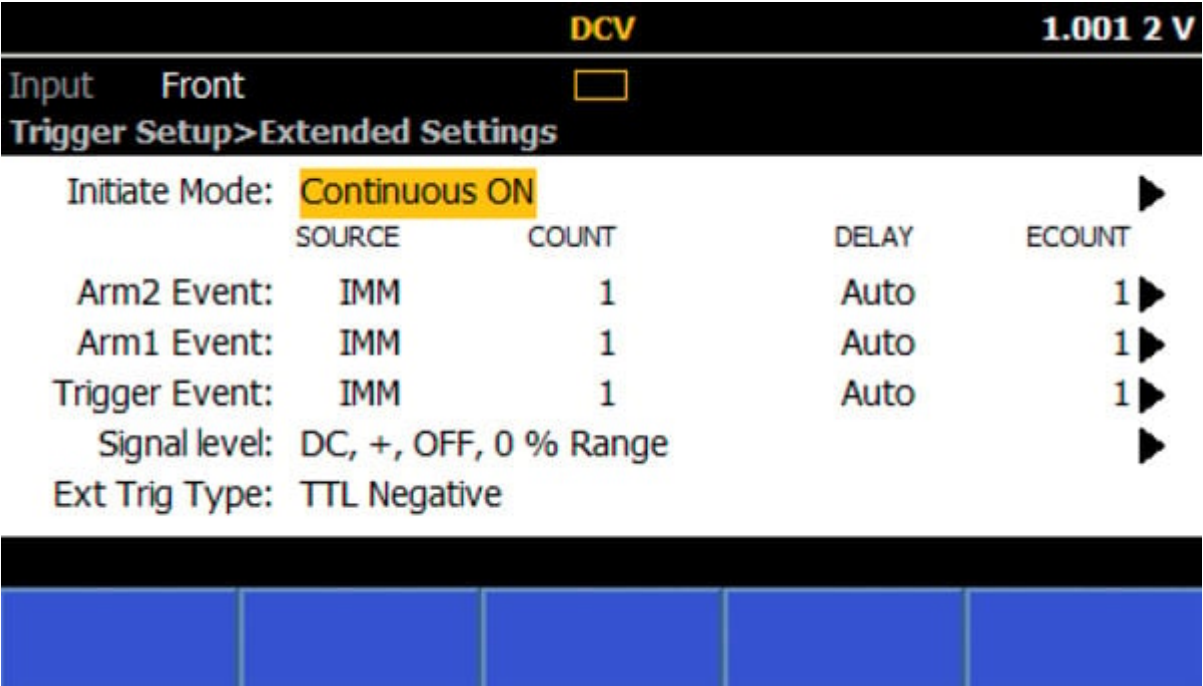


Trigger System

## Usability features ease training and operation


Some popular system digit multimeters have complex menu structures and unintuitive commands, while others lack any user interface, presenting barriers to training and operation. By contrast, the 8558A features an easy-to-access configuration menu that makes it easy to train new users. Language choices include English, Chinese, French, German, Japanese, Korean, Russian and Spanish. The graphical display lets you easily visualize trends, histograms, complex waveforms, and statistics. Repeatable system-specific tasks can be automated quickly and easily.

The 8558A’s front panel features Visual Connection Management™ output terminals that light up to show which terminals are active, guiding the user to make the correct connections. The handles and spin wheel are over-molded for comfort and easy transport.

USB host ports are placed both on the front and rear of the unit. Use them to export data to external memory devices and simplify firmware updates.

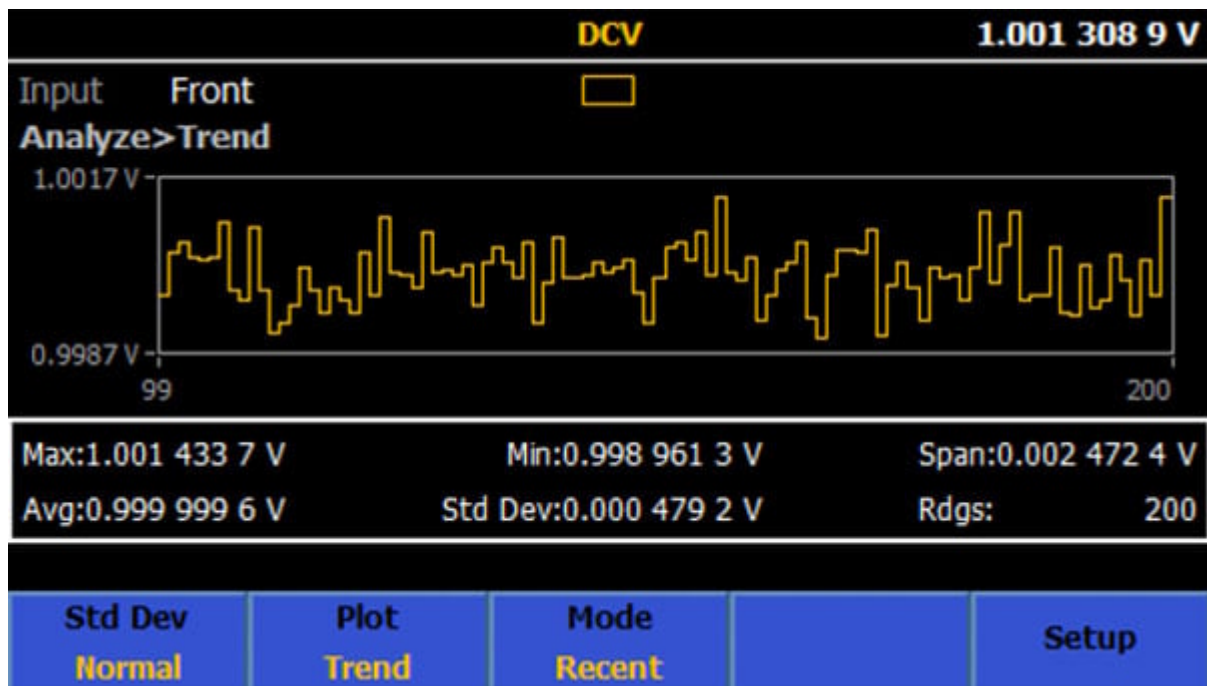

Trend Plot

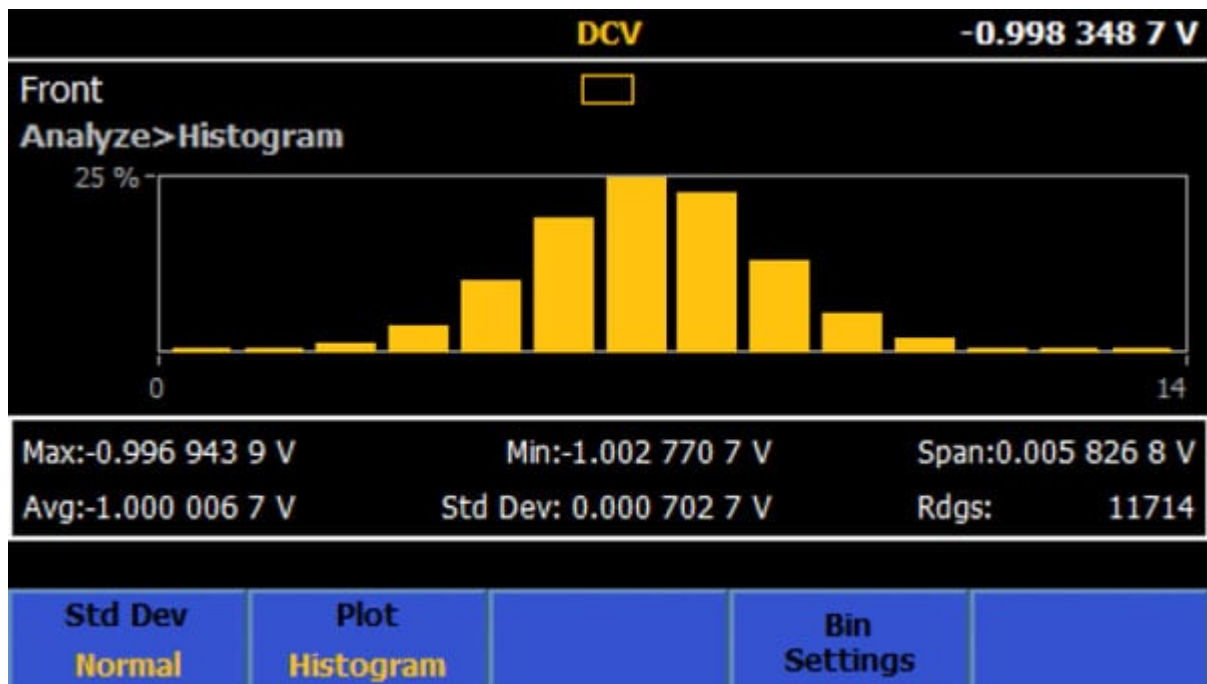

Analyze: Histogram

## The MET/CAL™ Calibration Management Software advantage

The 8588A and 8558A work with Fluke Calibration [MET/CAL™ Calibration Software](https://flukecal.com/vi-vn/product/calibration-tools/electrical-calibration/bench-multimeters/8558a) with native MET/CAL support or

using 8508A emulation mode to increase throughput up to four times that of traditional manual and multi-product methods while ensuring calibrations are performed consistently every time. This powerful software documents calibration procedures, processes and results for ease in complying with ISO 17025 and similar quality standards.

## Support and services when you need them

Fluke Calibration offers testing, [repair and calibration services](#) to meet your needs quickly and at a fair cost while maintaining the high level of quality that you expect. Our electrical calibration laboratories are accredited for conformance to ISO/IEC Guide 17025 and we maintain global calibration and repair facilities.

## Get peace of mind and uptime with a Gold CarePlan service package

The 8588A/8558A multimeters come with a standard one year factory warranty. You can enhance warranty protection with a Priority Gold Instrument CarePlan service package.

A Priority Gold Instrument CarePlan includes an expedited annual calibration to reduce downtime by a week and extended warranty to help ensure the best long-term performance from your instruments. Choose from one-year, three-year or five-year Care- Plans. (Note: Priority shipping times vary by country. Contact your local Fluke Calibration sales representative for details.)

## Thông số kỹ thuật: 8558A 8.5 Digit Multimeter

[8588A complete specifications](#)

[8558A complete specifications](#)

Key feature and specification comparison	8558A	<a href="#">8588A</a>
<b>DC voltage</b>	100 mV - 1000 V	100 mV - 1000 V
<b>AC voltage</b>	10 mV - 1000 V, 1 Hz - 10 MHz	10 mV - 1000 V, 1 Hz - 10 MHz
<b>Resistance, LoI, HV</b>	1 $\Omega$ - 10 G $\Omega$	1 $\Omega$ - 10 G $\Omega$
<b>DC current</b>	10 $\mu$ A - 2 A	10 $\mu$ A - 30 A
<b>AC current</b>	10 $\mu$ A - 2A, 1 Hz to 100 kHz	10 $\mu$ A - 30 A, 1 Hz to 100 kHz
<b>Digitize V</b>	100 mV - 1000 V, 5 MSamples/s, up to 20 MHz BW	100 mV - 1000 V, 5 MSamples/s, up to 20 MHz BW
<b>Digitize I</b>	10 $\mu$ A - 2 A, 5 MSamples/s, up to 4 MHz BW	10 $\mu$ A - 30 A, 5 MSamples/s, up to 4 MHz BW
<b>Frequency (V, I, BNC)</b>	1 Hz to 10 MHz, 1 Hz to 100 kHz, 10 Hz to 100 MHz	1 Hz to 10 MHz, 1 Hz to 100 kHz, 10 Hz to 100 MHz
<b>Temperature</b>	PRT / Thermocouple (ext CJC)	PRT / Thermocouple (ext CJC)
<b>Capacitance</b>	No	1 nF - 100 mF

<b>RF power</b>	No	R&S NRP Series
<b>Ext. dc current and ac current</b>	No	A40B current shunt and other shunts
<b>Graphical display</b>	Yes	Yes
<b>Visual Connection Management ®</b>	Yes	Yes
<b>Programmable front/rear input switching</b>	Yes	Yes
<b>Ratio difference, deviation - ohms, voltage</b>	Yes	Yes
<b>Extcal 10 MHz ref clock, 50 Î©/Hi-Z</b>	Yes	Yes
<b>A40B and other shunt asset management</b>	No	Yes
<b>GPIO 488.2, Ethernet, USB TMC</b>	Yes	Yes
<b>SCPI command compatibility</b>	Yes	Yes
<b>3458A emulation, 8508A emulation</b>	Yes	Yes
<b>Memory</b>	15 million	15 million
<b>Level and other trigger</b>	Yes	Yes
<b>FFT onboard</b>	No	Yes
<b>Reading rates: 5 MS/s into memory, bus: 100 kS/s at 4.5 digits, 1 rdg/s at 8.5 digits</b>	Yes	Yes

Function			8558A uX/X of reading + uX/X of range		8588A uX/X of reading + uX/X of range	
			95%	99%	95%	99%
DC voltage	10 V	relative	4.0 + 0.06	5.2 + 0.08	2.7 + 0.05	3.5 + 0.06
		absolute	4.1 + 0.06	5.3 + 0.08	2.8 + 0.05	3.6 + 0.06
AC voltage	10 V, 1 kHz	relative	80 + 10	103 + 13	60 + 5	77 + 6.5
		absolute	90 + 10	116 + 13	64 + 5	83 + 6.5
Resistance	10 kΩ	relative	10 + 0.6	13 + 0.7	7 + 0.5	9 + 0.6
		absolute	10.3 + 0.6	13.3 + 0.7	7.2 + 0.5	9.2 + 0.6
DC current	1 mA	relative	9 + 5	12 + 6	6.5 + 4	8.4 + 5
		absolute	9.8 + 5	13 + 6	7.6 + 4	10 + 5
AC current	1 mA, 1 kHz	relative	300 + 100	387 + 129	250 + 50	323 + 65
		absolute	310 + 100	400 + 129	260 + 50	335 + 65
Frequency	1 kHz	relative	N/A	N/A	0.5	0.5
Temperature	PRT 100 Ω	relative	± 5 mK	± 5 mK	± 5 mK	± 5 mK
Capacitance	1 uF	relative	N/A	N/A	400 + 100	516 + 129
		absolute	N/A	N/A	406 + 100	523 + 129

95% 1 year relative specification. Fluke Calibration guarantees to 99% confidence interval  $k=2.58$ . For 99%, multiply by  $(2.58/2)$

## Looking for lower specs? See our other benchtop multimeters:

Bench Multimeter Selection Guide			
Model	Resolution	Accuracy	Application
<a href="#">8588A</a>	8.5	2.7 $\mu\text{V/V}$ 95% confidence level, 1 year relative accuracy	Metrology
<a href="#">8558A</a>	8.5	4.0 $\mu\text{V/V}$ 95% confidence level, 1 year relative accuracy	High-Speed Automation
<a href="#">8845A/8846A</a>	6.5	Basic V dc accuracy of up to 0.0024 %	Bench
<a href="#">8808A</a>	5.5	Basic V dc accuracy of 0.015 %	Bench



## Model



### 8558A

8.5 Digit Multimeter

Includes:

- Meter
- 8588A-LEAD KIT-OSP General purpose probe kit & pouch with 2x 4-way shorting PCB

### 8588A

Reference Multimeter

Includes:

- Meter
- 8588A-LEAD KIT-OSP General purpose probe kit & pouch with 2x 4-way shorting PCB

**Fluke.** *Giữ cho thế giới của bạn. không ngừng vận động.*

**Fluke Corporation**  
PO Box 9090, Everett, WA 98206 U.S.A.

**Representative office of Fluke South East Asia Pte Ltd**

C/O Danaher Vietnam  
Green Power Tower, 11th Floor Unit 2  
35 Ton Duc Thang Street, District 1  
Ho Chi Minh City  
Vietnam

Tel: +84-8-2220-5371 (ext 103)

Email: [info.asean@fluke.com](mailto:info.asean@fluke.com)

[www.fluke.com/vn](http://www.fluke.com/vn)

©2025 Fluke Corporation. Specifications subject to change without notice.  
05/2025

**For more information call:**

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa

+31 (0)40 267 5100

In Canada (905) 890-7600

From other countries +1 (425) 446-5500

**Modification of this document is not permitted without written permission from Fluke Corporation.**